






Pipes & Joints

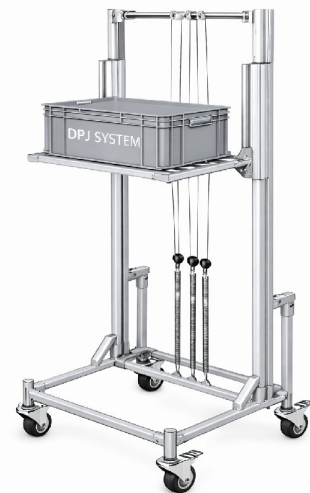

DPJ System

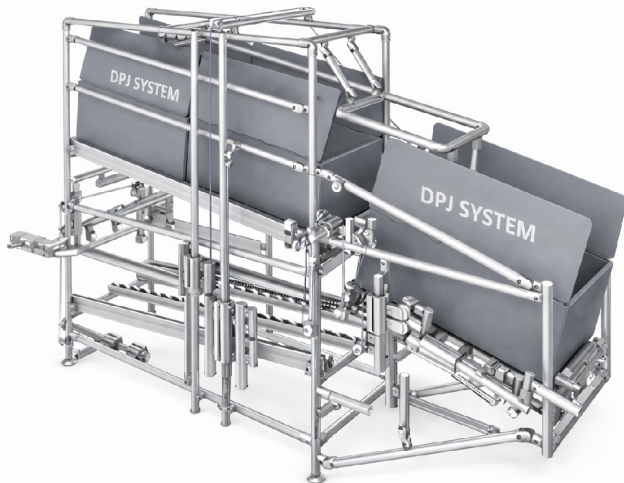


Authorised Dealer

Version : 07.26  
Order Code : 777 ... ..





Pipes & Joints



DPJ System

Pipes,  
Cover Caps



1

Connector &  
Joints



2

Feet  
Wheels




3

Hanging  
Tools



4

Fixing &  
Installation



5

Roller  
Tracks



6



# 3 DPJ SYSTEM



## ALUMINIUM PIPES

### General

**Material:** AL 6063-T6  
**Tensile Strength:**  $\geq 220 \text{ N/mm}^2$   
**Natural Anodizing Thickness:** 10-15  $\mu\text{m}$   
**Length:** 6 m

### General



## 4 DPJ SYSTEM



### ALUMINIUM PIPES

777 100 001

#### Aluminium Pipe -28 mm

Quantity / Box : 24 m

Weight / M : 0.370 kg


Weight / Box : 10 kg

Standard Length : 6 m

**Recommended Safe Working Load (SWL) :**

Span Length (meters) &  
Max Load (Kg) :

1 meter: 60 kg



777 100 002

#### T Slot Aluminium Pipe -28 mm

Quantity / Box : 24 m

Weight / M : 0.620 kg


Weight / Box : 16 kg

Standard Length : 6m

**Recommended Safe Working Load (SWL) :**

Span Length (meters) &  
Max Load (Kg) :

1 meter: 75 kg



777 100 003

#### Reinforced Aluminium Pipe -28 mm

Quantity / Box : 24 m

Weight / M : 0.720 kg


Weight / Box : 18.5 kg

Standard Length : 6m

**Recommended Safe Working Load (SWL) :**

Span Length (meters) &  
Max Load (Kg) :

1 meter: 110 kg



## ALUMINIUM PIPES

### Single Side Aluminium Pipe 28mm

777 100 004

Quantity / Box : 24 m

Weight / M : 0.666 kg


Weight / Box : 17 kg

Standard Length : 6 m

**Recommended Safe Working Load (SWL) :**

Span Length (meters) &  
Max Load (Kg) :

1 meter: 90 kg



1

### Bilateral Aluminium Pipe 28mm

777 100 005

Quantity / Box : 24 m

Weight / M : 0.695 kg


Weight / Box : 18 kg

Standard Length : 6 m

**Recommended Safe Working Load (SWL) :**

Span Length (meters) &  
Max Load (Kg) :

1 meter: 120 kg



### Duplex Aluminium Pipe 28mm

777 100 006

Quantity / Box : 24 m

Weight / M : 0.875 kg


Weight / Box : 22 kg

Standard Length : 6 m

**Recommended Safe Working Load (SWL) :**

Span Length (meters) &  
Max Load (Kg) :

1 meter: 180 kg

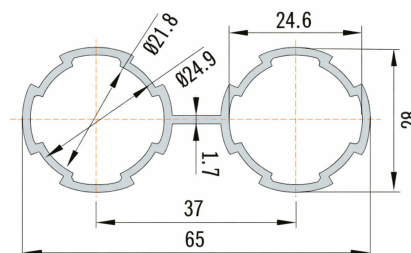

## 6 DPJ SYSTEM




### COVER CAPS

777 103 001

Pipe End Cap

1

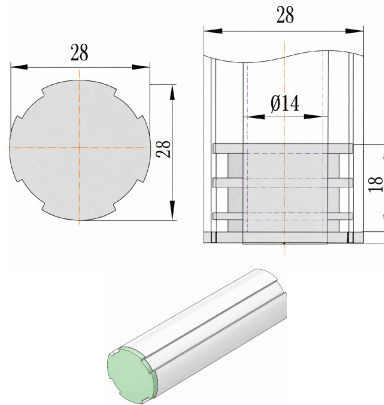

Quantity / Box : 100 Pcs

Weight / Pc : 2.8 g


Weight / Box : 0.28 kg

**Material :** PP

**Color:** Natural / White

777 103 005

Pipe Reinforced cap

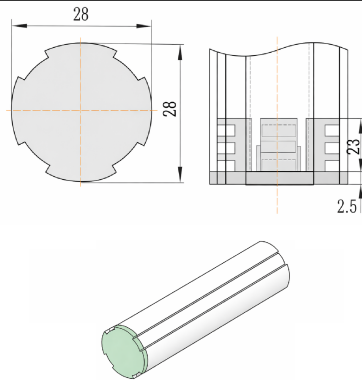

Quantity / Box : 100 Pcs

Weight / Pc : 2.29 g


Weight / Box : 0.22kg

**Material :** PP

**Color:** Natural / White

777 103 006

Pipe T-Slot End Cap

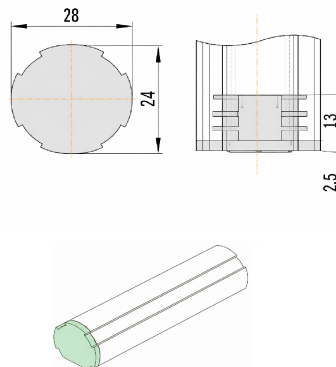

Quantity / Box : 100 Pcs

Weight / Pc : 2.19 g

Weight / Box : 0.21kg

**Material :** PP

**Color:** Natural / White





## Concealed Cable Slot

777 103 007



Quantity / Box : 50 Pcs

Weight / M : 195g

Weight / Box : 9.75 kg

Standard Length: 4 m

**Material** : PP



## 8 DPJ SYSTEM




### CONNECTORS & JOINTS

777 102 001

Pipe External Direct Connector

2

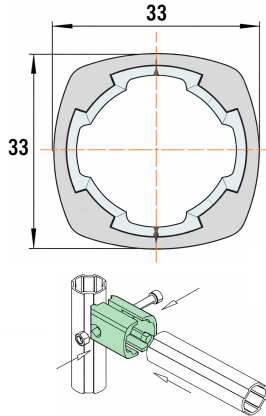

Quantity / Box : 20 Pcs

Weight / Pc : 60 g


Weight / Box : 1.2 kg

**Material :** Die-Cast Aluminium

**Safe Working Load (SWL):** 40 Kg

777 102 002

Pipe 45° Reinforced Joint

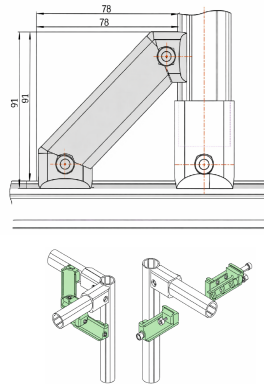

Quantity / Box : 20 Pcs

Weight / Pc : 125 g



Weight / Box : 2.5 kg

**Material :** Die-Cast Aluminium

**Safe Working Load (SWL):** 50 Kg

777 102 003

Pipe 90° Cross Joint

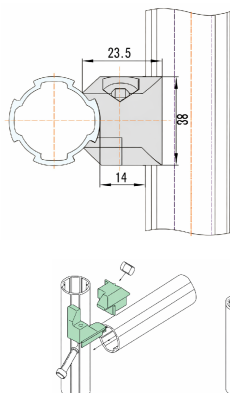

Quantity / Box : 20 Pcs

Weight / Pc : 33g

Weight / Box : 0.66 kg

**Material :** Die-Cast Aluminium


**Safe Working Load (SWL):** 35 Kg

"Load values are based on static uniformly distributed load (UDL), span 1000 mm, safety factor  $\geq 3$ . Actual load depends on frame design and weakest component."

## CONNECTORS & JOINTS

777 102 004

Pipe 45° External Bend Joint

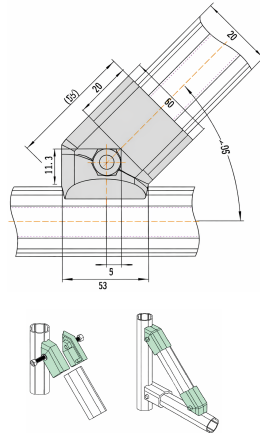

Quantity / Box : 20 Pcs

Weight / Pc : 65 g

Weight / Box : 1.3 kg


**Material:** Die-Cast Aluminium

**Safe Working Load (SWL) :** 50 Kg

2

777 102 005

Pipe Parallel Connection

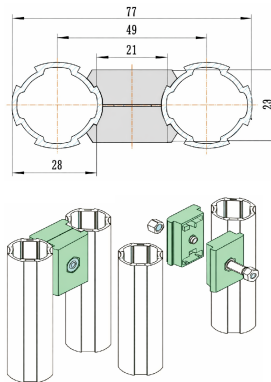

Quantity / Box : 20 Pcs

Weight / Pc : 50 g


Weight / Box : 1kg

**Material:** Die-Cast Aluminium

**Safe Working Load (SWL) :** 45 Kg

777 102 006

Pipe 90° External Bend Joint



Quantity / Box : 20 Pcs

Weight / Pc : 98 g

Weight / Box : 1.96 kg

**Material:** Die-Cast Aluminium



**Safe Working Load (SWL) :** 65 Kg

## CONNECTORS & JOINTS

777 102 007

Pipe External Holding Foot

2

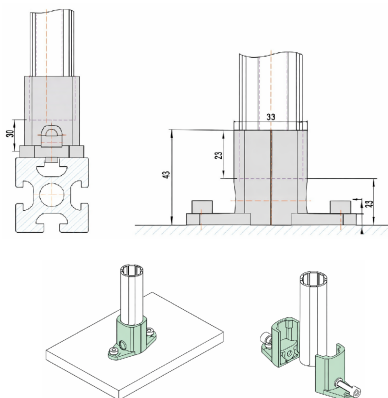

Quantity / Box : 20 Pcs

Weight / Pc : 79 g



Weight / Box : 1.58 kg

**Material:** Die-Cast Aluminium

**Safe Working Load (SWL): (Vertical):** 60 kg

777 102 008

Pipe 90° Angle Fixed Joint

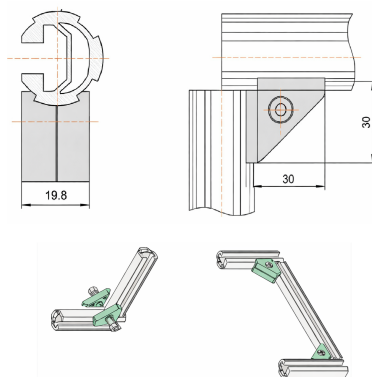

Quantity / Box : 20 Pcs

Weight / Pc : 31 g



Weight / Box : 0.620 kg

**Material:** Die-Cast Aluminium

**Safe Working Load (SWL):** 65 Kg

777 102 009

Pipe 90° Movable Outer Joint

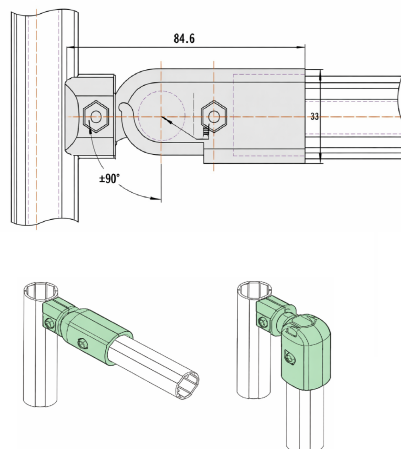

Quantity / Box : 20 Pcs

Weight / Pc : 130 g

Weight / Box : 2.6 kg



**Material:** Die-Cast Aluminium

**Safe Working Load (SWL):** 25 Kg

## CONNECTORS & JOINTS

777 102 010

Pipe Platen Fixing Buckle

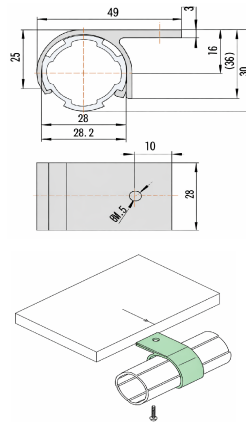

Quantity / Box : 20 Pcs

Weight / Pc : 15.5 g

Weight / Box : 0.031 kg



**Material:** Al 6063 T6

**Safe Working Load**  
(SWL): 25 Kg

2

777 102 011

Pipe Castor Base joint

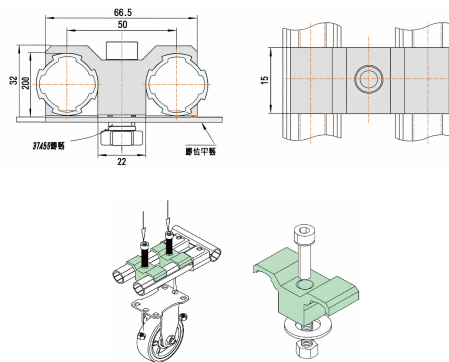

Quantity / Box : 20 Pcs

Weight / Pc : 80.5 g



Weight / Box : 1.61 kg

**Material:** Die-Cast  
Aluminium

**Safe Working Load**  
(SWL): 80 Kg

777 102 012

Pipe Locating Ring of sliding sleeve

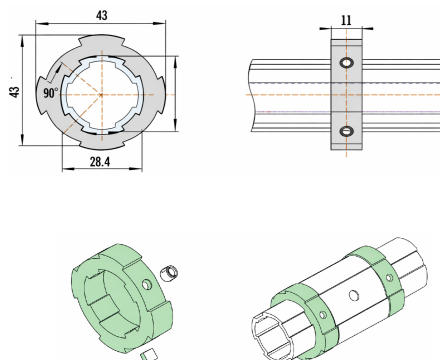

Quantity / Box : 20 Pcs

Weight / Pc : 19.5 g

Weight / Box : 0.39 kg

**Material:** Al 6063 T6



# 12 DPJ SYSTEM




## CONNECTORS & JOINTS

777 102 013

Pipe Strong Positioning Seat

2

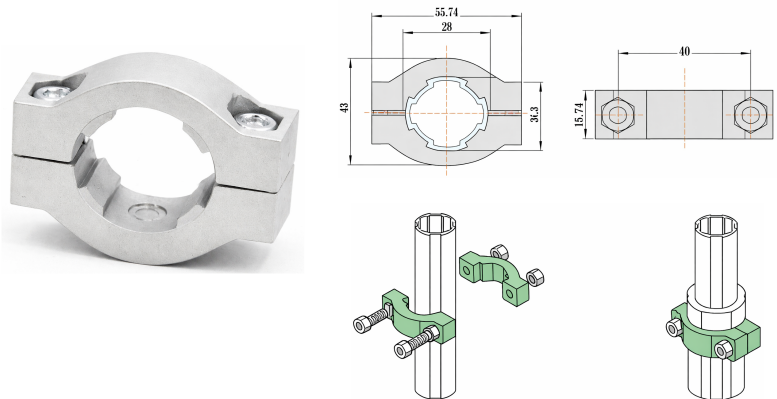

Quantity / Box : 20 Pcs

Weight / Pc : 55 g


Weight / Box : 1.1 kg

**Material:** Die-Cast Aluminium

**Safe Working Load (SWL):**  
(Vertical + Shear): 90 Kg

777 102 ...

Pipe Slide As-Linear Rotation 37mm

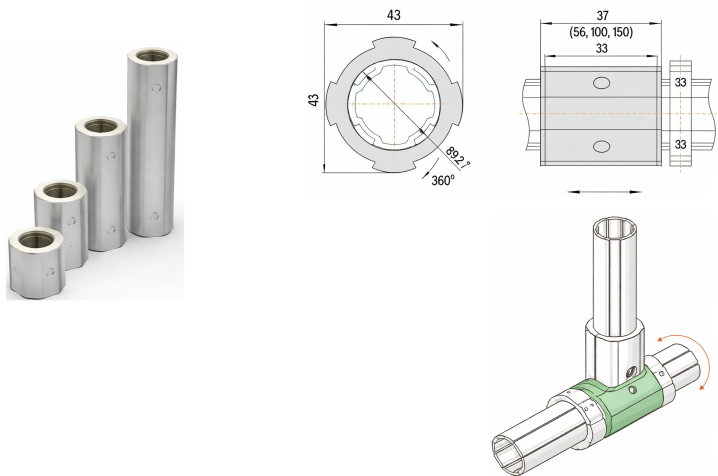

Quantity / Box : 20 Pcs

**Material:** Al 6063 T6 + ABS

37mm (L) : 777 102 015-18.3g

**Safe Working Load(SWL):** 25 Kg

56mm (L) : 777 102 016-44.5g

**Safe Working Load(SWL):** 30 Kg

100mm (L) : 777 102 017-78g

**Safe Working Load(SWL):** 40 Kg

150mm (L) : 777 102 018-113g


**Safe Working Load(SWL):** 50 Kg

"Load values are based on static uniformly distributed load (UDL), span 1000 mm, safety factor  $\geq 3$ . Actual load depends on frame design and weakest component."



## CONNECTORS & JOINTS

777 102 ...

Pipe Linear Scroll Assembly



100 mm L - 777 102 019



200 mm L - 777 102 020



300 mm L - 777 102 021

100 mm L - 777 102 019

Quantity / Box : 1 Pc

Weight / Pc : 335 g

Weight / Box : 0.335 kg

**Safe Working Load(SWL): 40 kg**

200 mm L - 777 102 020

Quantity / Box : 1 Pc

Weight / Pc : 495 g

Weight / Box : 0.495 kg

**Safe Working Load(SWL): 60 kg**

300 mm L - 777 102 021

Quantity / Box : 1 Pc




Weight / Pc : 645 g

Weight / Box : 0.645 kg

**Safe Working Load(SWL): 80 kg**

777 102 022

Pipe Rotator

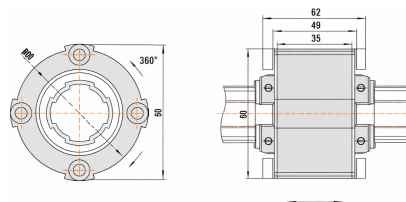

Quantity / Box : 20 Pcs

Weight / Pc : 248 g

Weight / Box : 0.248 kg

**Material:** 6065T6 + CS

**Safe Working Load (SWL): 40 kg**


# 14 DPJ SYSTEM



## CONNECTORS & JOINTS

777 102 023

Pipe Internal Straight Head

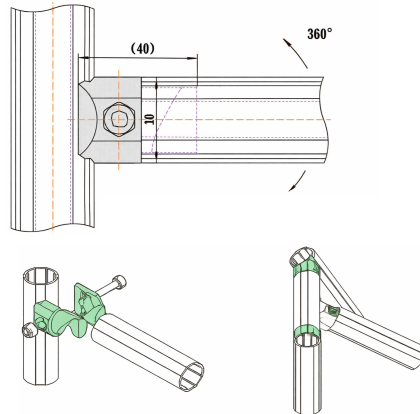

Quantity / Box : 20 Pcs

Weight / Pc : 45 g



Weight / Box : 0.9 Kg

**Material:** Die-Cast  
Aluminium

**Safe Working Load  
(SWL) :** 25 Kg

777 102 024

Pipe Parallel Fixed Joint

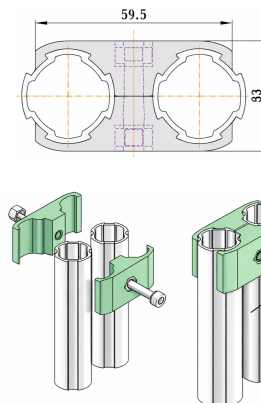

Quantity / Box : 20 Pcs

Weight / Pc : 73 g


Weight / Box : 1.46kg

**Material:** Die-Cast  
Aluminium

**Safe Working Load  
(SWL) :** 25 Kg

777 102 025

Pipe Function Accessory A

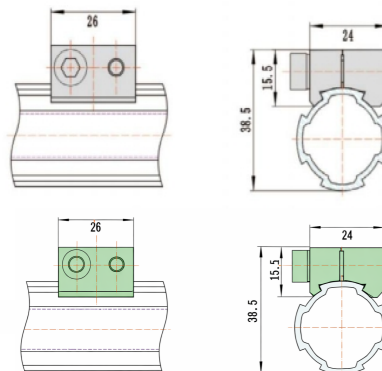

Quantity / Box : 20 Pcs

Weight / Pc : 24 g

Weight / Box : 0.48kg

**Material:** 6065T6

**Safe Working Load  
(SWL) :** 25 Kg

"Load values are based on static uniformly distributed load (UDL), span 1000 mm, safety factor  $\geq 3$ .  
Actual load depends on frame design and weakest component."



## DPJ SYSTEM 15

### Pipe Connection Joint

777 102 027



Quantity / Box : 20 Pcs

Weight / Pc : 47g

Weight / Box : 0.94Kgs

**Material:** Die-Cast  
Aluminium

**Safe Working Load**  
(SWL) : 25 Kg


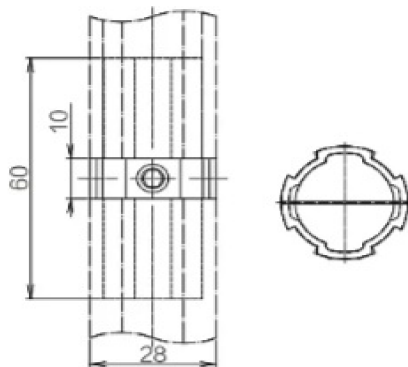


## FEET

### General

#### Application:

Used to compensate for uneven floors and for height adjustment.



3

### Feet Ø40

777 105 001

Quantity/Box: 10

Weight/Pc: 0.070 Kg

Weight/Box: 0.700 Kg


Swivelling Range:  $\pm 5^\circ$

#### Material

Nylon,

Screw : MS, Zinc Blue coated  
Includes locking nut M10x1.5mm

**Max Load:** 25 kg

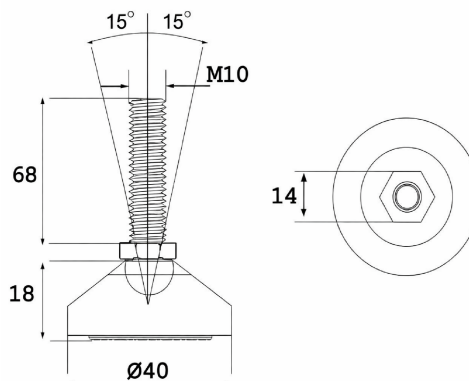


## 16 DPJ SYSTEM



### FEET

777 105 002

**Feet Ø60**

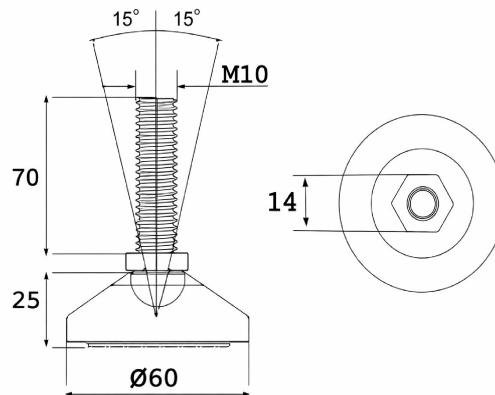

Quantity/Box: 10  
Weight/Pc: 0.080 Kg  
Weight/Box: 0.800 Kg  
Swivelling Range:  $\pm 5^\circ$


#### Material

Nylon,  
Screw : MS, Zinc Blue coated  
Includes locking nut M10x1.5mm

**Max Load:** 75 kg

777 105 003

**Feet Ø80**

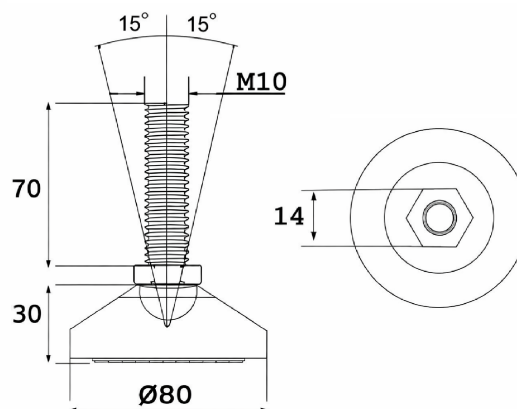

Quantity/Box: 10  
Weight/Pc: 0.140 Kg  
Weight/Box: 1.4 Kg  
Swivelling Range:  $\pm 5^\circ$

#### Material

Nylon,  
Screw : MS, Zinc Blue coated  
Includes locking nut M10x1.5mm

**Max Load:** 25 kg

**General**

**Material :** Die Cast  
Aluminium

**Application:**

- \* Used at the bottom of vertical pipes
- \* Provides stable grounding for racks and frames



**Pipe Heavy Split Foot Rest****777 102 014**

Quantity / Box : 100 Pcs

Weight / Pc : 29g

Weight / Box : 2.9 kg


Lock Nut Included: M10 × 1.5

**General**

**Material :** PP

**Application:**

- \* Used at the bottom of vertical pipes
- \* Prevents direct pipe-to-floor contact


**Pipe Integrated Fixed Foot Base****777 103 002**

Quantity / Box : 100 Pcs

Weight / Pc : 18.2 g

Weight / Box : 1.82 kg


Nut : M10 × 1.5

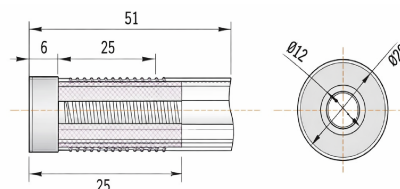



## CASTOR WHEELS

### General



**Material:** PVC


#### Application:

PVC castor wheels offer reliable and excellent mobility solutions.

PVC wheels have good anti-aging properties. They also protect the floors from damage.

777 106 001

### Castor Wheel Ø50 with Brake




Quantity/Box : 1  
Weight / pc : 0.243 kg  
Swivel Radius : 50  
Wheel Size : 50x26  
Bolt : M10x1.5mm-25mm (L)

**Load Capacity:** 50 kg

3

777 106 002

### Castor Wheel Ø50 without Brake



Quantity/Box : 1  
Weight / pc : 0.185 kg  
Swivel Radius : 50  
Wheel Size : 50x26  
Bolt : M10x1.5mm-25mm (L)

**Load Capacity:** 50 kg

## CASTORS

**NOTE :** Refer to DAP System Catalogue

### General

#### Material

Wheel: Polyurethane (PUR)

Maroon colour


Bearing: TPFE

#### Application

For trolleys

#### Advantages

Economic and easy to mount



### Castors Ø75 (Flange Type)


999 132 ...

#### With brake

|                |        |
|----------------|--------|
| Quantity/box   | 10     |
| Weight/pc      | 736g   |
| Weight/box     | 7.36kg |
| Max.load/wheel | 110kg  |

#### Without brake

|                |        |
|----------------|--------|
| Quantity/box   | 10     |
| Weight/pc      | 603g   |
| Weight/box     | 6.30kg |
| Max.load/wheel | 110kg  |



001 002



Swivel Type

### Castors Ø75 (Stud Type M12X30)


999 132 ...

#### With brake

|                |        |
|----------------|--------|
| Quantity/box   | 10     |
| Weight/pc      | 647g   |
| Weight/box     | 6.47kg |
| Max.load/wheel | 110kg  |

#### Without brake

|                |        |
|----------------|--------|
| Quantity/box   | 10     |
| Weight/pc      | 509g   |
| Weight/box     | 5.09kg |
| Max.load/wheel | 150kg  |



003 004



Swivel Type

# 20 DPJ SYSTEM




**NOTE :** Refer to DAP System Catalogue

999 132 005

**Fixed Ø75**



**Fixited Type**



|                |        |
|----------------|--------|
| Quantity/box   | 10     |
| Weight/pc      | 424g   |
| Weight/box     | 4.24kg |
| Max.load/wheel | 110 kg |

999 132 ...


**Castor 100Ø (Flange Type)**

:006

:007



**Swivel Type**



**With brake :006**

|                |        |
|----------------|--------|
| Quantity/box   | 10     |
| Weight/pc      | 837g   |
| Weight/box     | 8.37kg |
| Max.load/wheel | 130 kg |

**Without brake :007**

|                |        |
|----------------|--------|
| Quantity/box   | 10     |
| Weight/pc      | 706g   |
| Weight/box     | 7.06kg |
| Max.load/wheel | 130Kg  |

999 132 ...


**Castor 100Ø (Stud Type M12x30)**

:008

:009



**Swivel Type**



**With brake :008**

|                |        |
|----------------|--------|
| Quantity/box   | 10     |
| Weight/pc      | 744g   |
| Weight/box     | 7.44kg |
| Max.load/wheel | 130 kg |

**Without brake :009**

|                |        |
|----------------|--------|
| Quantity/box   | 10     |
| Weight/pc      | 613g   |
| Weight/box     | 6.13kg |
| Max.load/wheel | 170Kg  |

**Note:**Total trolley load = Load per wheel × number of wheels × 0.8 safety factor.




**NOTE :** Refer to DAP System Catalogue

## Castor 100Ø (Fixed)

999 132 010

|                |        |
|----------------|--------|
| Quantity/box   | 10     |
| Weight/pc      | 529g   |
| Weight/box     | 5.29kg |
| Max.load/wheel | 130 kg |



**Fixed Type**

## Castor 125Ø (Flange Type)



999 132 ...

### With brake :011

|                |        |
|----------------|--------|
| Quantity/box   | 10     |
| Weight/pc      | 931g   |
| Weight/box     | 9.31kg |
| Max.load/wheel | 150 kg |

### Without brake :012

|                |        |
|----------------|--------|
| Quantity/box   | 10     |
| Weight/pc      | 808g   |
| Weight/box     | 8.08kg |
| Max.load/wheel | 150 kg |

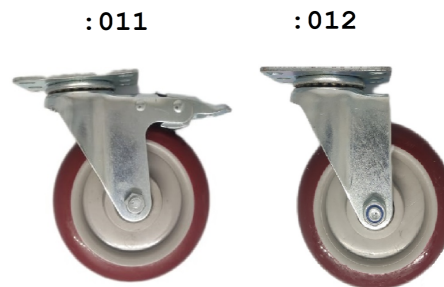


**Swivel Type**

## HANG TOOLS

777 103 004

Pipe Label Fixing Clip

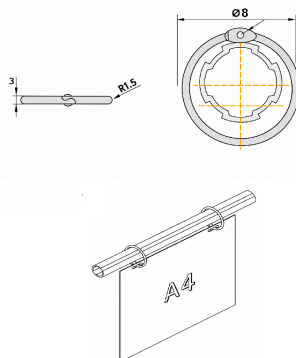

Quantity / Box : 20 Pcs

Weight / Pc : 9.2g


Weight / Box : 0.184kg

**Material:** Carbon Steel

1

777 104 003

Pipe Tag Clasp

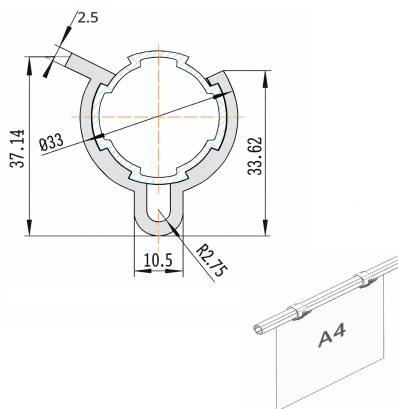

Quantity / Box : 20 Pcs

Weight / Pc : 3.3g


Weight / Box : 0.66 kg

**Material:** PVC

4

777 104 004

Pipe Label Buckle



Quantity / Box : 20 Pcs

Weight / Pc : 4.3g

Weight / Box : 0.086kg

**Material:** PVC

**NOTE :** Refer to DAP System Catalogue

## HANG TOOLS

### General



### Application



Sliding tool hanger for balancers with option to lock into fixed position.

999 147 ...

Tool hanger



:001




**Tool Hanger : 001**

Quantity/box 50  
Weight/ 0.007kgs  
Weight/box 0.350kgs

### Material

Poloxymethylene (POM)  
black:

:002



**Snap Hook : 002**

Quantity/box 50  
Weight/ 0.023kgs  
Weight/box 1.15kgs

### Material

Poloxymethylene (POM)  
black:

Hook:Steel

Load/kg : 70kg

### Advantages

Inexpensive and easy-to-use.







NOTE : Refer to DAP System Catalogue

FIXING & INSTALLATION

General

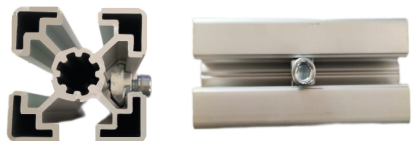

Material

Steel, zinc plated

Application

To fix components to profiles can be inserted into a closed frame.

Advantages

safe and conductive connection

999 150 ...

T Nut (Hammer nut) 



M4: 006

M5: 007



M6: 008

M8: 009



Quantity/box 100

M4

Weight/pc 8.27gms

Weight/box 0.827kgs

M5

Weight/pc 8.18gms

Weight/box 0.818kgs

M6

Weight/pc 7.77gms

Weight/box 0.777kgs



M8

Weight/pc 6.62gms

Weight/box 0.662kgs

SS T Nut (Hammer Nut) 

5



Quantity/box 100

Weight/pc 8.27gms

Weight/box 0.827kgs

Weight/pc 8.18gms

Weight/box 0.818kgs

Weight/pc 7.77gms

Weight/box 0.777kgs

Weight/pc 6.62gms

Weight/box 0.662kgs

**NOTE :** Refer to DAP System Catalogue

## T Nut (Hammer Nut) Nickel

999 176 ...

Quantity/box 100

### M4

Weight/pc 8.27gms

Weight/box 0.827kgs

### M5

Weight/pc 8.18gms

Weight/box 0.818kgs

### M6


Weight/pc 7.77gms

Weight/box 0.777kgs

### M8

Weight/pc 6.62gms

Weight/box 0.662kgs



M4 : 006

M5 : 007

M6 : 008

M8 : 008

## Slot Nut (SQ Nut)

999 151 ...

Quantity/box 100

### M4

Weight/pc 15.23gms

Weight/box 1.523kgs

### M5

Weight/pc 14.86gms

Weight/box 1.486kgs

### M6



Weight/pc 14.45gms

Weight/box 1.445kgs

### M8

Weight/pc 13.27gms

Weight/box 1.327kgs

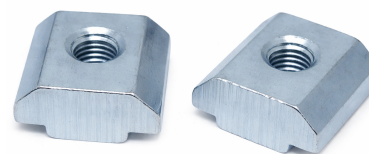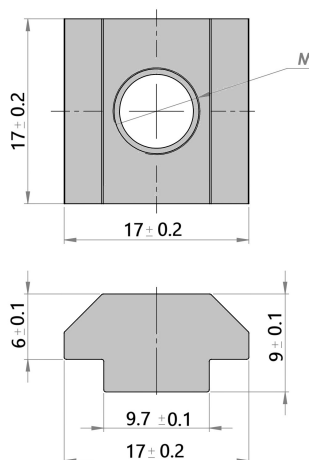

M4 : 006

M5 : 007

M6 : 008

M8 : 008

## Slot Nut (SQ Nut) Nickel

999 177 ...

Quantity/box 100

### M4

Weight/pc 15.23gms

Weight/box 1.523kgs

### M5

Weight/pc 14.86gms

Weight/box 1.486kgs

### M6



Weight/pc 14.45gms

Weight/box 1.445kgs

### M8

Weight/pc 13.27gms

Weight/box 1.327kgs

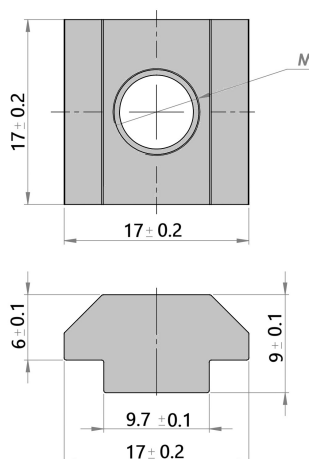

M4 : 006

M5 : 007


M6 : 008

M8 : 008

## ROLLER TRACKS

777 101 006

**Pipe Roller Track 40**

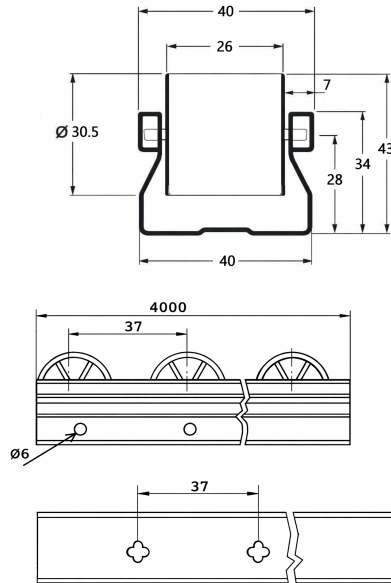

Standard Length: 4M

Weight / Pc:4.65 Kg

Weight/M:4.65 Kg


Weight/Box:5.5 Kg

Wheel Pitch : 37mm

Load Carrying Capacity 120 kg / m.

777 101 007

**Pipe Roller Track 40 A**

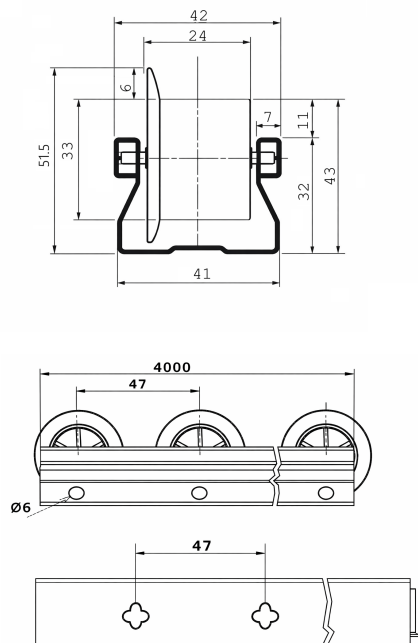

Standard Length: 4M

Weight/Pc:4.88 Kg

Weight/M:1.22Kg

Weight/Box:5.55 Kg

Wheel Size: 45-33x24

Wheel Pitch : 47mm



Load Carrying Capacity 60 kg / m.  
on 2 chute

**Roller Track Clamp**

777 101 008

Quantity/Box: 10  
Weight/Pc: 0.153 Kg  
Weight/Box: 1.53 Kg

**Material:** Steel, Zinc  
Blue Coated

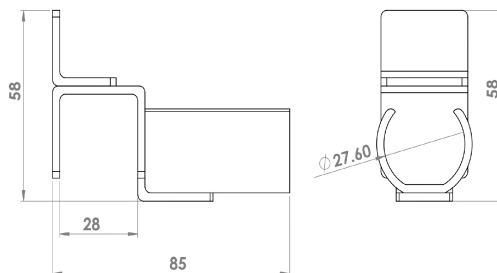



### Page No:

Aluminium Pipes.....

**3-5**

Cover Caps.....

**6-7**

Connectors & Joints.....

**8-15**

Feet & Wheels.....

**15-21**

Hang Tools.....

**22-23**

Fixing & Installation Material.....


**24-25**

Roller Tracks.....

**26-27**



## Pipes & Joints System

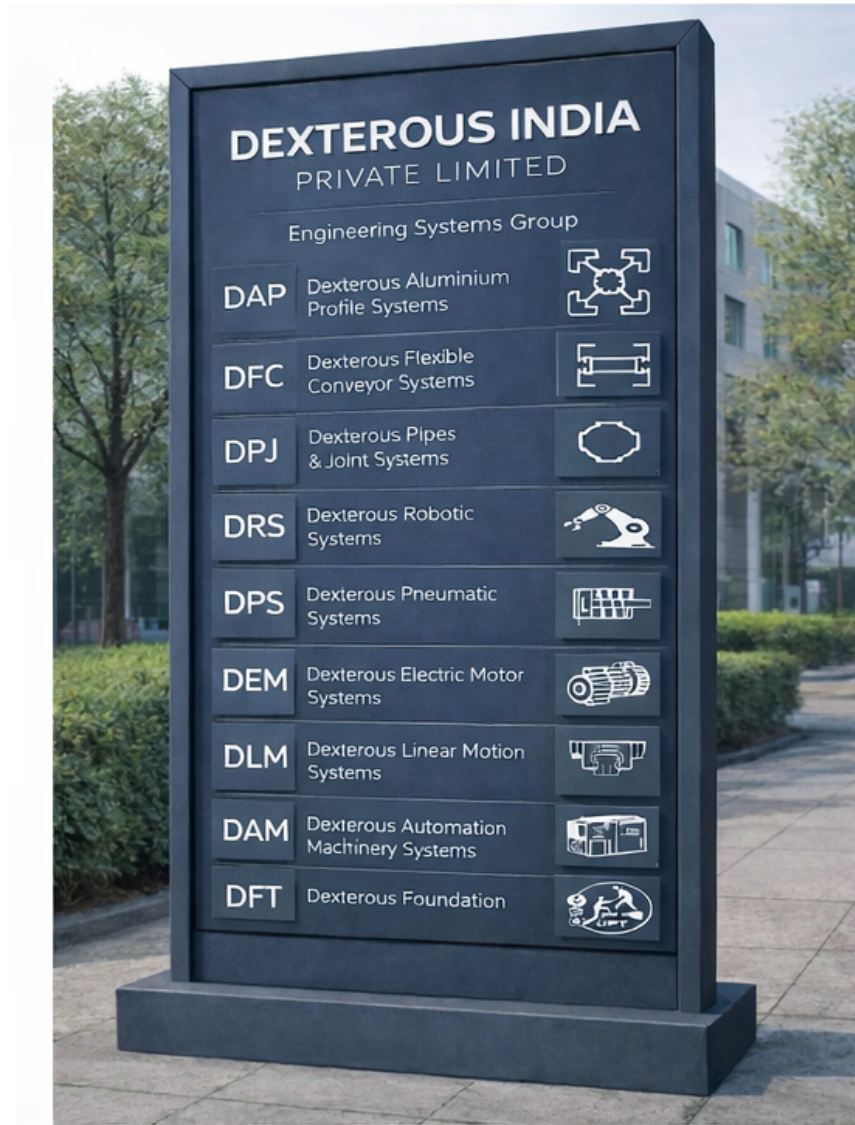

### Authorised Dealer

#### **DEXTEROUS INDIA PRIVATE LIMITED**

51B 50A MUKUNDA DAIRY PDT, BOMMASANDRA  
JIGANI LK RD, Bommasandra Industrial  
Estate, Bangalore South,  
Bangalore- 560099 | Karnataka- India IN.  
CIN:U46699KA2025PTC212847

[www.dexterousaluminiumprofile.com](http://www.dexterousaluminiumprofile.com)  
[info@dexterousaluminiumprofile.com](mailto:info@dexterousaluminiumprofile.com)

#### **Authorised Dealer**

Bangalore | Chennai | Coimbatore | Delhi | Hyderabad | Mumbai | Pune | Gujarat